



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUSPA INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUSPA INCORPORATED IS PROHIBITED.

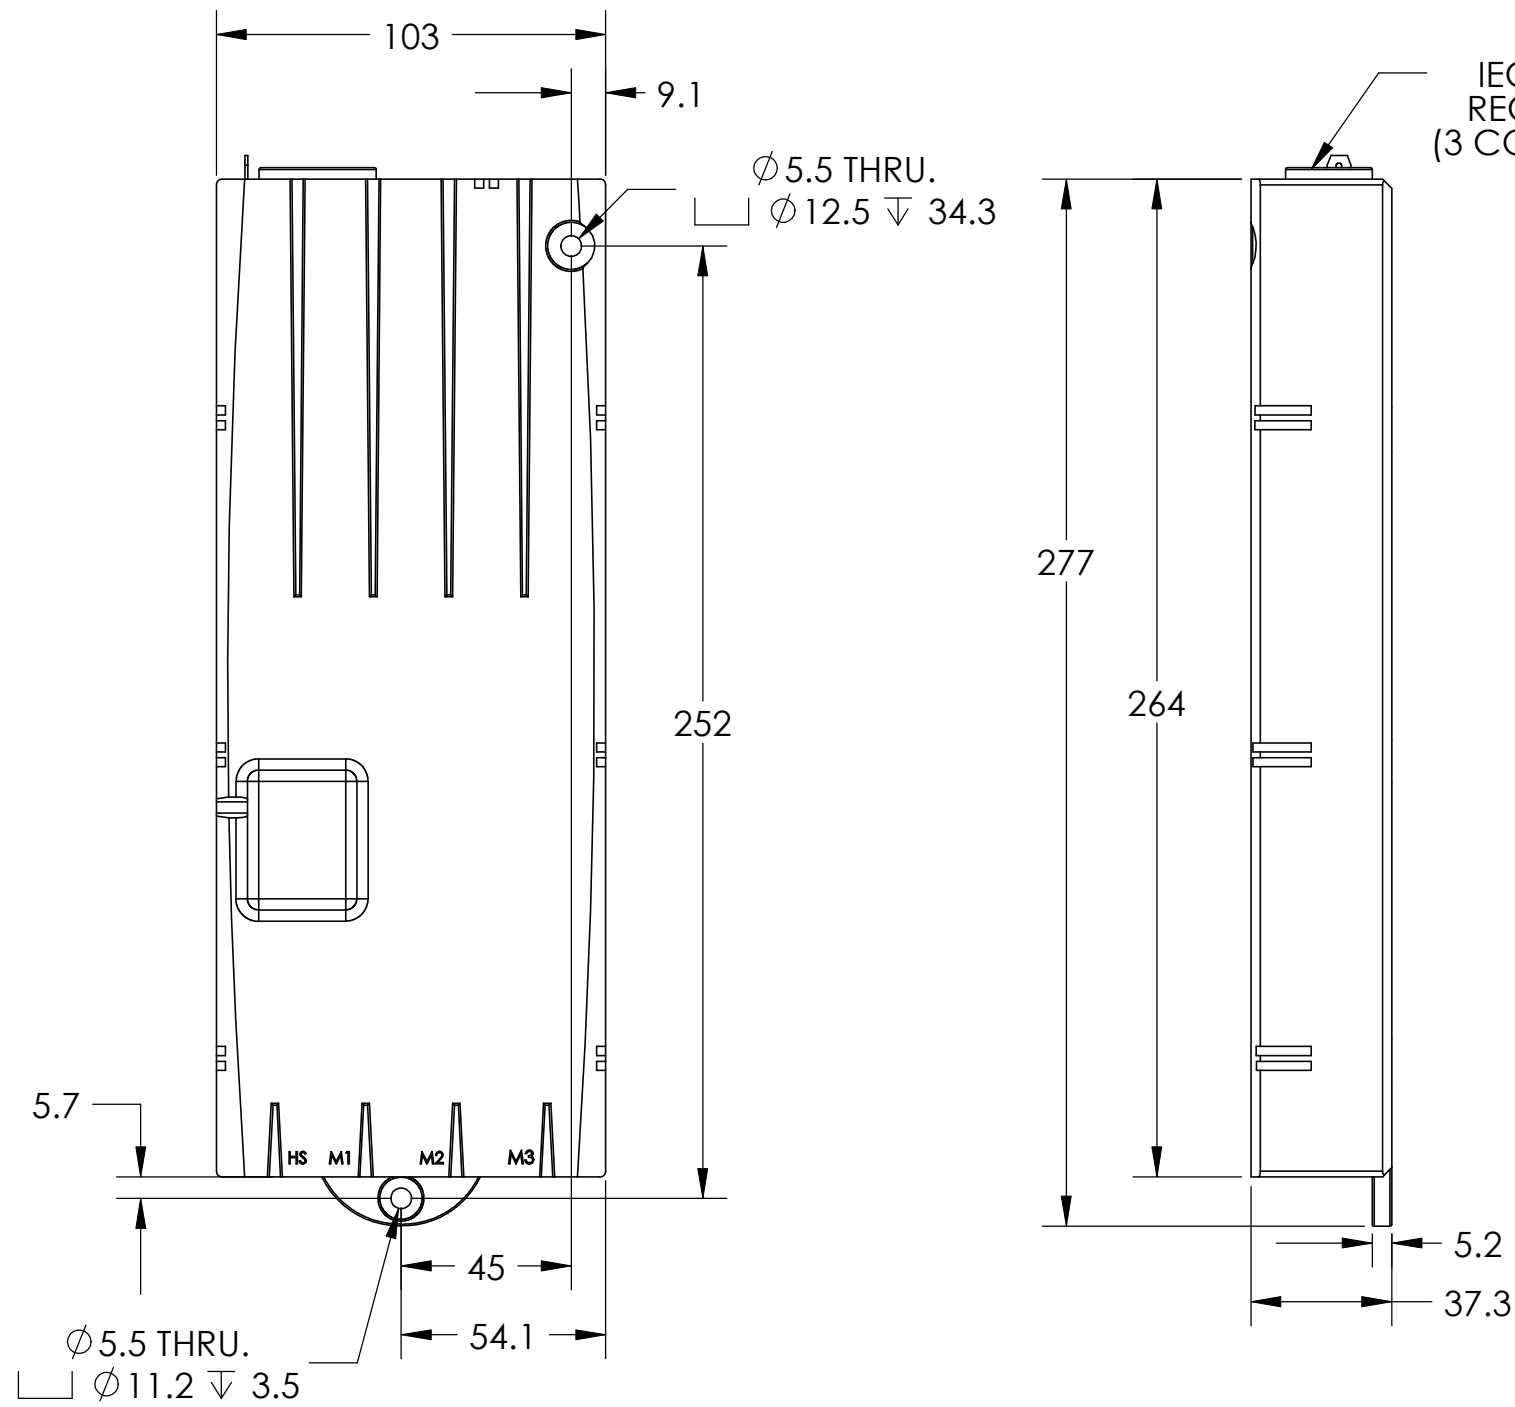

IEC POWER RECEPTACLE (3 CONDUCTOR)

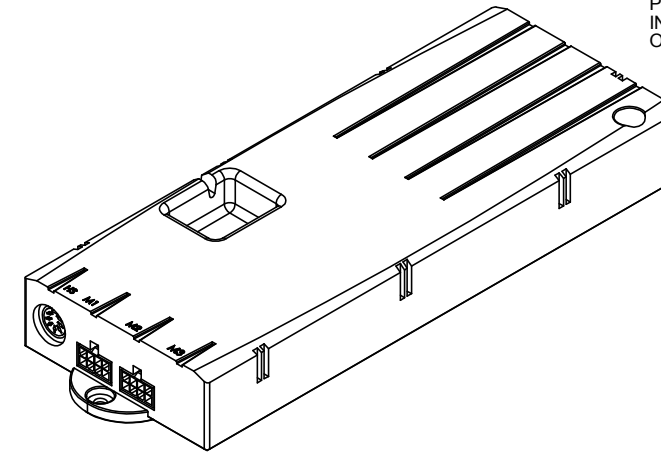


ISOMETRIC VIEW  
SCALE 1:3

NOTES:

- 1.) ALL DIMENSIONS ARE REFERENCE ONLY.
- 2.) ELECTRICAL CHARACTERISTICS:
  - INPUT VOLTAGE/FREQUENCY: 90-127VAC, 50/60Hz.
  - CONTROL VOLTAGE/CURRENT: 27VDC/9A.
  - SWITCH VOLTAGE/CURRENT: 5VDC/150mA.
- 3.) DUTY CYCLE: 10% (1 minute ON, 9 minutes OFF).
- 4.) OPERATING TEMPERATURE: 0-30° C.
- 5.) STORAGE TEMPERATURE: -40-85° C.
- 6.) PROTECTION CLASS: I.
- 7.) MOTOR CONTROL IS UL RECOGNIZED IN US AND CANADA UNDER UL STANDARD 60650 (REFERENCE UL FILE NUMBER: E219105).
- 8.) POWER CORD (3 METERS LONG) INCLUDED WITH MOTOR CONTROL.
- 9.) WEIGHT: 0.5 kg.

7 PIN DIN RECEPTACLE (SWITCH CONNECTION)

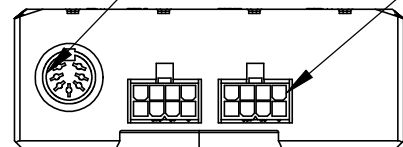

8 PIN MOLEX RECEPTACLE (2X AS SHOWN) - (M1, M2 CONNECTION)

<b>DO NOT MANUFACTURE TO THIS DRAWING UNLESS IT IS MARKED "CONTROLLED"</b>			
DO NOT SCALE THIS DRAWING DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED			
ONE PLACE DECIMAL	+/-0.2	ANGULAR	+/-2°
TWO PLACE DECIMAL	+/-0.1		
DRAWN BY	DATE	SCALE	THIRD ANGLE PROJECTION
AJB	03/30/11	1:2	
CUSTOMER DRAWING			

REV	ECN	DESCRIPTION	CHANGED BY	APPROVED BY	DATE (MM/DD/YY)
		RELEASED	AJB		05/17/11
US 120V COM/E CONTROLLER					
MATERIAL		N/A			
DRAWING NUMBER		S45-0027			
3970 Roger B. Chaffee S.E. Grand Rapids, Michigan 49548-3497 www.suspa-inc.com					DRAWING SIZE
					B